


TOA Putty Sander PACS

Product Description

Name : PACS
Type : Dry Sanding
Backing : Awt- Latex Paper
Bonding : Resin over Resin
Grain : Aluminium Oxide
Coating : Open Coat
Shape : Roll , Sheet

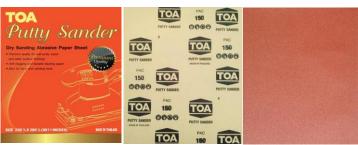

Available Grit									
09	80	100	120	150	180	220	240	280	320
•	•	•	•	•	•	•	•	•	•

Product Features

- High performance sanding ability for wall putty surface
- · Long lasting sanding ability
- No clogging

Applications

Workpieces

- Wood
- Furniture
- Wall putty

Available Sander / Grinder

- Hand Sanding
- Orbital Sander

Recommendations

• Select grit number of abrasive paper suitable to the sanding surface

Appliacation	Grit No.		
Cutting down Wood surface	#60-#120		
Surface Condition	#150-#320		
Wall putty	#60-#320		

Packaging Size

J									
Grit no.	Sheet/ Sleeve	Sleeve/ Carton	Sheet/ Carton						
60-180	100	5	500						
220-320	100	10	1000						

Handling and Storage

- Avoid dampish places
- Avoid direct exposure to sunlight
- Avoid close to the source of heat

Safety and Disposal

- For full Health and Safety information please refer to Material Safety Data Sheet
- Observe the precautionary notices displayed on the sleeve
- Goggles and suitable protective equipment must be worn while using these products
- Good ventilation must be provided in the working environment

